


The CME6005 is a BiCMOS integrated straight through receiver with build in very high sensitivity for the time signal transmitted from WWVB, DCF77, JJY, MSF and HBG. The receiver is prepared for single-and dual band reception.

Below is the circuit diagram for a dual band application using CME6005 and 2 NPN transistors. By making use of these circuit, the CME6005 can switch between dual frequency by control of the MCU.

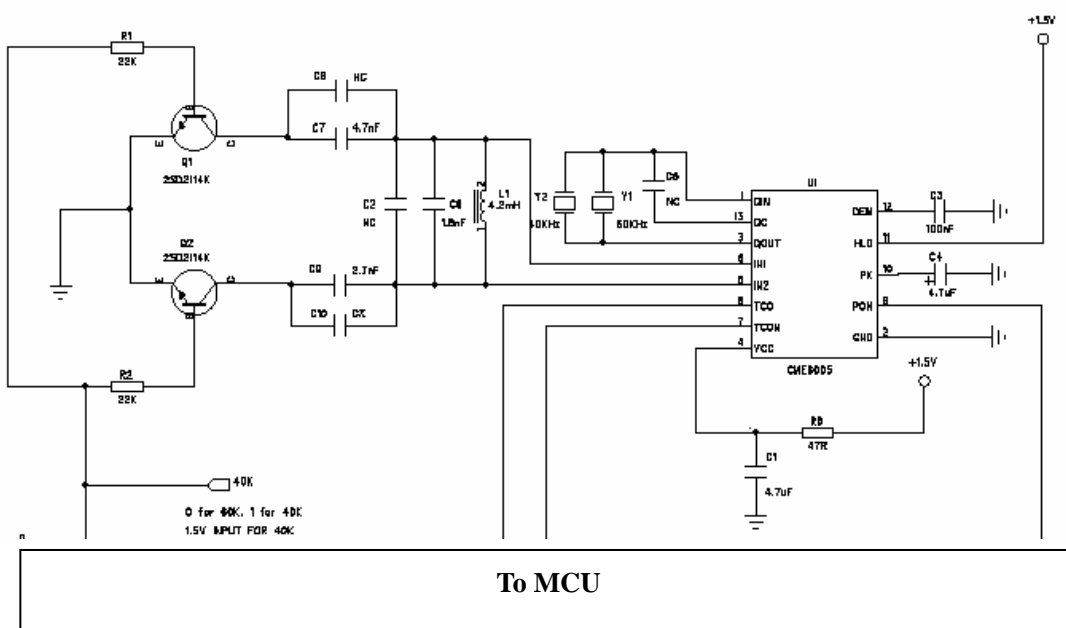

The MCU is responsible for the control of switch between the two frequencies, controlling the power on (PON) of the receiver IC as well as analyzing the pulses that are provided as output from the CME6005 (TCO or TCON)

In order to obtain the same high sensitivity as single band, the transistor is carefully chosen with specific electrical characteristics.

The electrical characteristics of this transistor are as follows:

● **Electrical characteristics** (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Collector-base breakdown voltage	BV _{CB0}	25	-	-	V	I _C =10μA
Collector-emitter breakdown voltage	BV _{CEO}	20	-	-	V	I _C =1mA
Emitter-base breakdown voltage	BV _{EB0}	12	-	-	V	I _E =10μA
Collector cutoff current	I _{CBO}	-	-	0.5	μA	V _{CB} =20V
Emitter cutoff current	I _{EB0}	-	-	0.5	μA	V _{EB} =10V
Collector-emitter saturation voltage	V _{CE(sat)}	-	0.18	0.4	V	I _C /I _B =500mA/20mA
DC current transfer ratio	h _{FE}	820	-	2700	-	V _{CE} =3V, I _C =10mA
Transition frequency	f _T *	-	350	-	MHz	V _{CE} =10V, I _E =-50mA, f=100MHz
Output capacitance	C _{ob}	-	8.0	-	pF	V _{CB} =10V, I _E =0A, f=1MHz
Output On-resistance	R _{on}	-	0.8	-	Ω	I _B =1mA, V _I =100mV(rms), f=1kHz

* Measured using pulse current

Disclaimer of Warranty

Information furnished is believed to be accurate and reliable. However C-MAX assumes no responsibility, neither for the consequences of use of such information nor for any infringement of patents or other rights of third parties, which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of C-Max. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. C-MAX products are not authorized for use as critical components in life support devices without express written approval of C-MAX.

Note

It is not given warranty that the declared circuits, devices, facilities, components, assembly groups or treatments included herein are free from legal claims of third parties.

The declared data are serving only to description of product. They are not guaranteed properties as defined by law. The examples are given without obligation and cannot give rise to any liability.

Reprinting this data sheet - or parts of it - is only allowed with a license of the publisher.

C-MAX reserves the right to make changes on this specification without notice at any time.

C-MAX Time Solutions GmbH

Carl-Zeiss-Str. 13
74078 Heilbronn

Tel.: +49-7066-900400

Fax: +49-7066-9004029

e-mail: contact@c-max-time.com

Data sheets can also be retrieved from our Internet homepage: www.c-max-time.com